




CXM 4/0

male insert, 4 poles + PE, screw terminal connection, 80A, 830V, size "77.27", CLASS inserts




Product description		Approvals / Standards	
Model	male insert	Reference standard	EN 61984:2009-06
Version	screw terminal connections	Quality mark	 DNV-GL, EAC
Series	CX	Conformity	CQC, CE
Product type	with male contacts	General ordering information	
Family	CLASS inserts	EAN13 code	8015747042581
Size	size "77.27"	ETIM classification	EC000438
N. of poles	4 poles + 	Packaging Information	
Technical data		Packaging length	245,00 mm
Current	80 A	Packaging height	165,00 mm
Voltage	830 V	Packaging width	215,00 mm
Rated impulse withstand voltage	8 kV	Packaging weight	3,82 kg
Pollution degree	3	Packaging volume	8,69 dm ³
Wire cross-section	4,00 mm ² - 16,00 mm ²	Packaging description	Carton box
AWG size	12 - 6	Packaging quantity	30 Pcs
Operating temperature range (min, max)	-40 °C ... +125 °C	Packaging EAN code	8015747191821
Contact material	silver plated	Sub-packaging length	87,00 mm
Mating cycles	≥ 500	Sub-packaging height	36,00 mm
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure	Sub-packaging width	180,00 mm
Further technical details		Sub-packaging weight	0,64 kg
Characteristics according to EN 61984	80A 830V 8kV 3	Sub-packaging volume	0,56 dm ³
Insulation resistance	≥ 10 GΩ	Sub-packaging description	Carton tray
Contact resistance	≤ 0.3 mΩ	Sub-packaging quantity	5 Pcs
Rated voltage according to UL/CSA	600 V	Sub-packaging EAN barcode	8015747042598
UL 94 flammability rating	V-0		
Weight	113,50 g		

Catalogue drawings

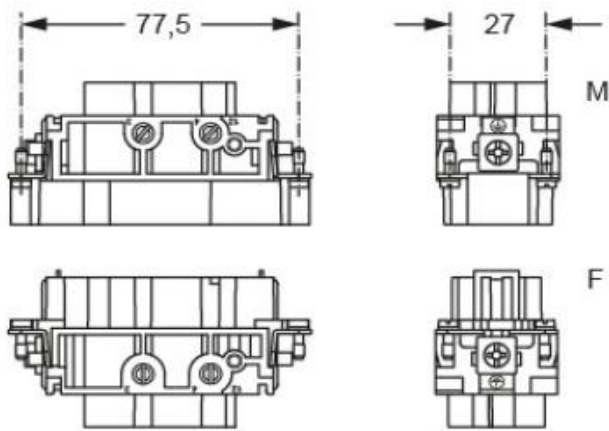

contacts side (front view)

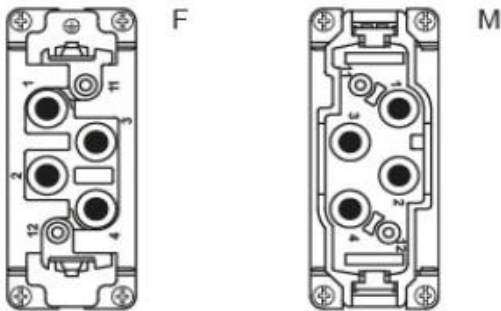

Derating curves

